


LT Series Flexible letterpress printing machine LT系列柔性凸版印刷机

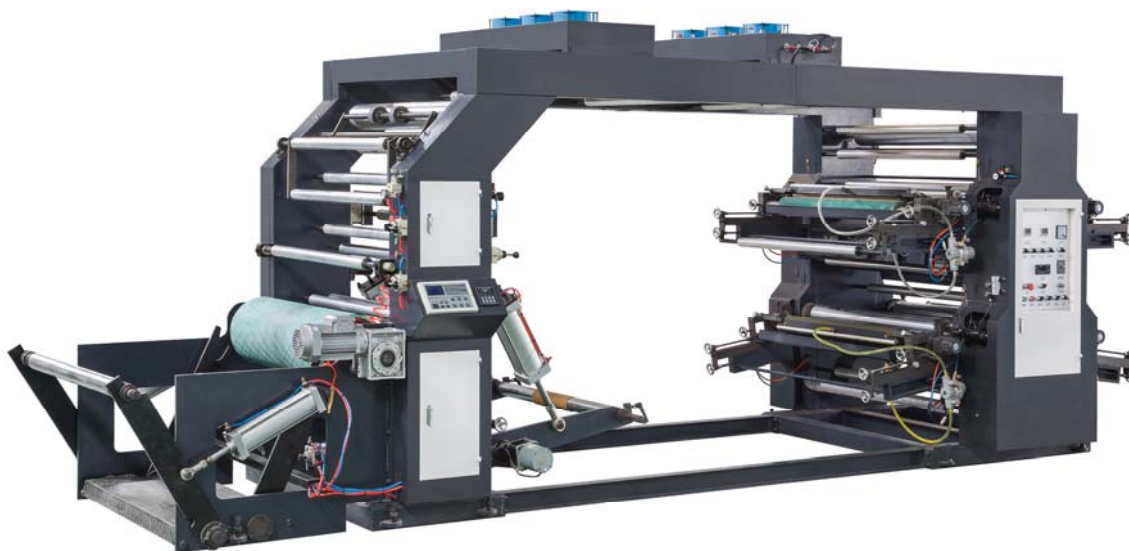

简介:

本机是用感光树脂软版作为版材的印刷机，适合印刷、聚乙烯、聚丙烯塑料袋、卷筒纸等包装材料，是食品纸包装，超市手提袋、马夹袋、服装袋等包装材料的理想印刷设备。

Introduction:

This machine is suitable for printing such packing materials as polyethylene, polypropylene plastic bag, glass paper and roll paper, etc. And it is a kind of ideal printing equipment for producing paper packing bag for food, supermarket handbag, vest bag and clothes bag, etc.

特点：

1. 采用斜齿轮传动，运行稳定，低噪音。
2. 起版与落版采用气动起落版。
3. 放料自动光电传感器纠偏控制系统。
4. 独立刮墨刀刮墨和自动油墨循环系统。
5. 独立分组式自动匀墨系统，可按需开启单组或多组进行匀墨
6. 配陶瓷网纹辊，高速下网点再现率高，网版印刷层次分明，立体感强。
7. 独立烘干区，采用中央恒温控制系统并分组控制。

Features:

1. using helical gear transmission, stable operation, low noise.
2. version and fall plate using pneumatic landing plate.
3. Deviation rectification control system of discharge automatic photoelectric sensor.
4. independent scraping knife scraping ink and automatic ink circulation system.
5. independent grouping type automatic ink mixing system, can be opened on demand, one or more groups of ink evenly
6. with ceramic anilox roller, high speed dot reproduction rate is high, screen printing layer is clear, three-dimensional feeling strong.
7. independent drying area, using central constant temperature control system and grouping control.

技术参数 Technical Parameter:

型号	Type	LT-4800	LT-41000	LT-41200	LT-41400
印刷颜色	Printing Color	4 Color	4 Color	4 Color	4 Color
最大印刷宽度	Max.Printing Width	750 mm	950 mm	1150 mm	1350 mm
最大材料宽度	Max.Material width	800 mm	1000 mm	1200 mm	1400 mm
印刷长度	Printing Length	200-1000 mm	200-1000 mm	200-1000 mm	200-1000 mm
最大速度	Max.Printing Speed	80 m/min	80 m/min	80 m/min	80 m/min
纸张要求	Paper Thickness	30-350 gsm	30-350 gsm	30-350 gsm	30-350 gsm
套准精度	Overprint Precision	±0.2 mm	±0.2 mm	±0.2 mm	±0.2 mm
版材厚度	Thickness of Plate	2.38 mm	2.38 mm	2.38 mm	2.38 mm
总功率	Total Power	13 kw	15 kw	15 kw	18 kw
机器重量	Weight of Machine	4000kg	4500kg	5000kg	5500kg
外形尺寸 (cm)	Overall Dimension (cm)	450*190*245	450*210*245	450*230*245	450*260*245